

# SL9

SLAM RTK

---



# SL9 SLAM RTK

SL9 SLAM RTK combines high-precision GNSS positioning with cutting-edge SLAM technology, eliminating the spatial constraints of traditional RTK measurements.

Whether in urban buildings, dense forests, or indoor environments, SL9 ensures reliable, precise measurements, redefining efficiency and versatility in fieldwork.



01



## Compact Locking Design

Portable body with no moving parts and a secure battery-host locking mechanism for vibration-free operation.

02

## Intuitive HD Touch Interface

User-friendly 2.8-inch touch-screen for seamless field workflow.



03



## Hot-Swappable Battery

60-second power continuity during swaps via integrated supercapacitor, eliminating shutdowns.

# Features

## New Image Measurement Combined with SLAM Technology

The SL9's HD camera is combined with SLAM data for visual contactless measurement. With Satsurv software, users only need to select the target point in the image to calculate its 3D coordinates in real time, with an accuracy of 2 to 5 centimeters within 15 meters.



## Fusion Technology Anywhere

When the SL9 is used in RTK rover mode for measurement and the device enters an area with weak or even no GNSS signal, the conventional RTK method won't work normally. The SL9 will reverse calculate the accurate RTK point coordinates from its LiDAR and SLAM data. This technology keeps a precision of 5 cm within 10 minutes without satellite signals.



## Volume Calculation

Based on high-performance point cloud processing technology on Android, Satsurv software can provide users with 3D terrain data in a timely manner and calculate the earthwork volume with simple operation.



## Unified Coordinate System

The SL9 facilitates a smooth transition between outdoor and indoor environments by utilizing a unified coordinate system. It allows for the direct export of BLH or NEZ cloud points data, offering users a comprehensive one-stop solution from the field to the office.



## Strong Signal and High-Quality Data

Full-constellation tracking (GPS/Galileo/GLONASS/BeiDou/NAV-IC) with enhanced signal robustness in urban canyons. BDS B2b + Galileo HAS + QZSS L6 convergence for centimeter-level reliability without base stations.



## Software




### Satsurv — Professional Measurement Software

Satsurv combines high-performance point cloud and image processing with CAD and real-world engines, delivering real-time point cloud calculations, visual accuracy heatmaps, and an intuitive user experience for fieldwork and layout tasks.




### Sat-LiDAR — Office Software

Post-process your data with Sat-LiDAR for <2 cm thickness and <1 cm accuracy. The software supports tunnel excavation analysis, progress monitoring, and acceptance checks. It also aids renovation projects with cross-section, plan, and elevation outputs.

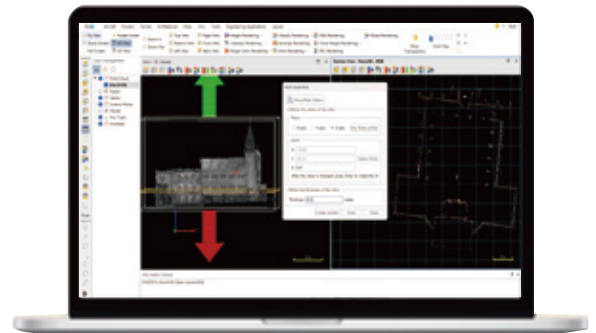

## Applications

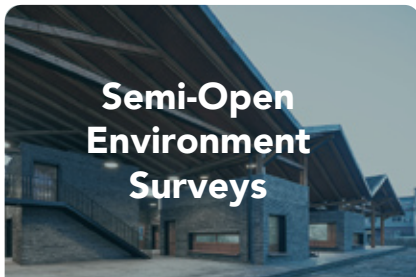

### Semi-Open Environment Surveys

SL9 excels in challenging environments like under eaves, dense forests, and urban canyons where traditional RTK struggles. It significantly improves efficiency in forestry and urban data collection.



### 3D Facility Mapping

Perfect for indoor and underground spaces, SL9 handles point cloud scanning with ease, making it ideal for underground parking lots, urban tunnels, and heritage sites.



### Engineering Surveys

From building facades in urban planning to road earthworks and mining volume assessments, SL9's point cloud technology streamlines data collection for various engineering projects.

# Dual Operating Modes



Retain the precision of traditional centering pole measurements for ground feature data collection.

Enjoy the flexibility of handheld operation, ideal for efficient SLAM point cloud collection in earthwork and underground spaces.



**SATLAB**<sup>®</sup>  
GEOSOLUTIONS

**Headquarters:**

Geosolution i Göteborg AB  
Stora Ävägen 21, 436 34 ASKIM,  
Sweden

**Regional Offices:**

Warsaw, Poland  
Jičín, Czech Republic  
Ankara, Turkey  
Scottsdale, USA  
Singapore  
Hong Kong, China  
Dubai, UAE

[www.satlab.com.se](http://www.satlab.com.se)



25M114



# Specifications

GNSS Configuration	Channel	1408
	GNSS Signal	GPS: L1C/A, L1C, L2P(Y), L2C, L5
		BDS: B1I, B2I, B3I, B1C, B2a, B2b
		GLONASS: L1, L2, L3
		GALILEO: E1, E5a, E5b, E6
		QZSS: L1, L2, L5, L6
		NavIC: L5
		SBAS: L1, L2, L5
		PPP: B2b-PPP, E6-HAS
	Output format	ASCII: NMEA-0183, Binary
System Configuration	Output rate	1Hz~20Hz
	Static data format	GNS, Rinex
	Real Time Kinematic	RTCM2.X, RTCM3.X
	Network Mode	VRS, FKP, MAC, Support NTRIP protocol
	Operation system	Linux
	Storage	Circulating 512GB ROM
	High-Precision Static	Horizontal: 2.5 mm + 0.1 ppm RMS         Vertical: 3.5 mm + 0.4 ppm RMS
	Static and Fast Static	H: 2.5 mm + 0.5ppm RMS         V: 5 mm + 0.5ppm RMS
	PPK	H: 8mm + 1ppm RMS         V: 15mm + 1ppm RMS
	PPP	H: 10cm         V: 20cm
Accuracy and Reliability <sup>[1]</sup>	Code Differential GNSS Positioning	H: ±0.25m+1ppm RMS         V: ±0.5m+1ppm RMS    SBAS: 0.5m (H), 0.85m (V)
	Real Time Kinematic (RTK)	H: 8mm+1ppm RMS         V: 15mm+1ppm RMS Initialization time: Typically <10s         Initialization reliability: Typically > 99.9%
	Tilt Survey Performance <sup>[2]</sup>	8mm+0.3mm/°tilt
	AR stakeout	Support
	Image measurement	A single photo can acquire multiple point coordinates, with an accuracy of better than 5cm within 15 meters <sup>[3]</sup>
	Mesurement without GNSS signal	After the satellite signal is lost, the accuracy of 5cm can still be guaranteed for 10 minutes or within the activity radius of 100m. <sup>[4]</sup>
	Real-time accuracy evaluation	Supports
	Pixel	3 Professional Dual HD Cameras
	Function	Support AR stakeout, image measurement, working distance 2~15m
	Range	0.1~ 40m@10%, 0.1~ 70m@80%
Laser Scanner	Laser product classification	Class 1 Eye Safe
	FOV	H: 160°         V: 59°
IMU	Update rate	200Hz
Communication	I/O Interface	USB type C port; SMA antenna port; Nano SIM card slot
	Network	TDD-LTE, FDD-LTE, GSM
	WiFi	IEEE 802.11a/b/g/n/ac/ax, 2.4GHz/5GHz, Wifi hotspot
	Bluetooth	Bluetooth 5.2
	Internal UHF Radio	Power: 0.5W/1W Adjustable    Frequency: 410MHz~470MHz Protocol: HI-TARGET, TRIMTALK450S, TRIMMARK III, SATEL-3AS, TRANSEOT, etc. Channel: 116 (16 scalable)
Sensor	Electronic bubble	Supports
	Tilt Survey	Built-in High-precision IMU Module
Control Panel	Physical button	Single button
	Display	2.8 inch, 480×640 pixel touchable screen
Application	LED lights	Mode, Accuracy, Network
	Advanced function	NFC, WebUI, Firmware upgrade via U-disk
	Intelligence application	Intelligent Voice, Self-check
	Remote service	Message push, online upgrade, remote control
Physical	Power <sup>[5]</sup>	Lithium battery, supports hot-swapping and portable charger
		RTK rover(UHF/Cellular): up to 10 hours         SLAM mode: up to 5 hours
		USB 45W fast charging, fully charged in 2 hours
	Size	Φ134.4mm×109.9mm
Environments	Weight	1.68kg
	Water/dustproof	IP64
	Humidity	100% non-condensing
	Operation temperature	-20 C ~+55 C
	Storage temperature	-40 C ~+70 C

<sup>\*</sup> Note:

[1]The measurement accuracy, precision, reliability and initialization time depend on various factors, including tilt angle, number of satellites, geometric distribution, observation time, atmospheric conditions and multi-path validation, etc. The data are derived under normal conditions.

[2]Irregular operations such as rapid rotation and high-intensity vibration may affect the inertial navigation accuracy.

[3]The results are the accuracy obtained in laboratory scenarios, and some scenarios may have accuracy deviations.

[4]The results are the accuracy obtained in laboratory scenarios, and some scenarios may have accuracy deviations; 10 minutes or activity radius 100m, whichever comes first.

[5]The battery operating time is related to the operating environment, operating temperature and battery life.

Descriptions and Specifications are subject to change without notice.